

Avfuktare Flexisorb

RECUSORB / CONSORB





Torrluftflöde
900 - 61100 m³/h

- Flexibel design
- Kundanpassad
- Tvättbar rotor
- Energisnål och miljövänlig
- Optimerad styrning
- Utdragbar roturenhet

Flexisorb:

Ett aggregat, många lösningar! Flexisorbsystemet gör att varje aggregat kan anpassas till kundens specifika behov.

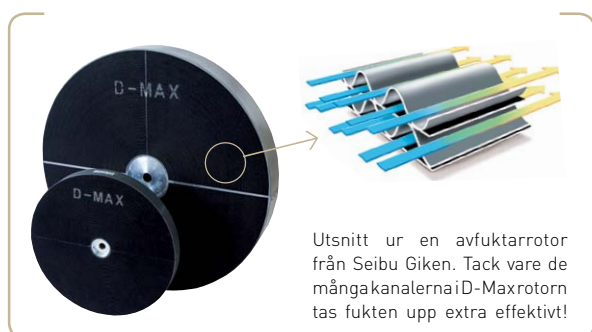

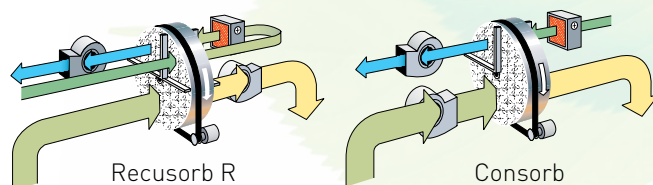

Recusorb - with internal heat recovery for good energy efficiency						
Unit	Min process airflow	Max process airflow	Max wet airflow	Heater power	2 g/kg from 10°C/100%RH *	Heater power *
RF-081	900 m ³ /h	4 500 m ³ /h	900 m ³ /h	8+8+8=24kW	2 500 m ³ /h	22 kW
RF-101	1 500 m ³ /h	7 000 m ³ /h	1 900 m ³ /h	24+12+6=42kW	3 600 m ³ /h	31 kW
RF-102	3 000 m ³ /h	9 700 m ³ /h	2 900 m ³ /h	40+20+10=70kW	6 500 m ³ /h	54 kW
RF-122	4 800 m ³ /h	15 600 m ³ /h	5 400 m ³ /h	64+32+16=112kW	10 600 m ³ /h	88 kW
RF-152	7 600 m ³ /h	24 800 m ³ /h	7 300 m ³ /h	100+50+25=175kW	16 800 m ³ /h	140 kW
RF-172	9 700 m ³ /h	31 500 m ³ /h	9 300 m ³ /h	226kW	21 300 m ³ /h	177 kW
RF-192	12 000 m ³ /h	39 900 m ³ /h	11 800 m ³ /h	288kW	27 100 m ³ /h	225 kW
RF-222	16 000 m ³ /h	51 300 m ³ /h	15 100 m ³ /h	368kW	34 800 m ³ /h	289 kW
RF-242	19 000 m ³ /h	61 100 m ³ /h	18 000 m ³ /h	438kW	41 500 m ³ /h	345 kW
* Process air flow to have dry air at 33°C / 2g/kg with: - process air inlet 10°C / 100%RH - wet air inlet at 30°C / 12 g/kg - wet air flow 36% of process air flow - regeneration temperature 140°C - purge by-pass						
Consort 75/25 - for large differences in moisture content between process and regeneration inlet						
Unit	Min process airflow	Max process airflow	Max wet airflow	Heater power	2 g/kg from 10°C/100%RH *	Heater power *
CF-081 75/25	1 000 m ³ /h	4 500 m ³ /h	900 m ³ /h	8+8+8=24kW	2 400 m ³ /h	24 kW
CF-101 75/25	2 000 m ³ /h	7 000 m ³ /h	1 900 m ³ /h	24+12+12=48kW	3 900 m ³ /h	39 kW
CF-102 75/25	3 700 m ³ /h	9 700 m ³ /h	2 900 m ³ /h	40+20+10+10=80kW	7 800 m ³ /h	75 kW
CF-122 75/25	6 000 m ³ /h	15 600 m ³ /h	5 400 m ³ /h	64+32+16+16=128kW	12 700 m ³ /h	123 kW
CF-152 75/25	9 500 m ³ /h	24 800 m ³ /h	7 300 m ³ /h	100+50+25+25=200kW	20 000 m ³ /h	193 kW
CF-172 75/25	12 000 m ³ /h	31 500 m ³ /h	9 300 m ³ /h	260kW	25 000 m ³ /h	241 kW
CF-192 75/25	15 000 m ³ /h	39 900 m ³ /h	11 800 m ³ /h	330kW	32 000 m ³ /h	308 kW
CF-222 75/25	19 000 m ³ /h	51 300 m ³ /h	15 100 m ³ /h	420kW	42 000 m ³ /h	404 kW
CF-242 75/25	23 000 m ³ /h	61 100 m ³ /h	18 000 m ³ /h	500kW	50 000 m ³ /h	481 kW
* Process air flow to have dry air at 36°C / 2g/kg with: - process air inlet 10°C / 100%RH - wet air flow at 33°C / 23 g/kg - wet air flow 26% of process air flow - regeneration temperature 140°C						
Consort 60/40 - when low-cost energy at low temperatures is available						
Unit	Regen. temp 45°C *	Regen. temp 70°C **	Regen. temp 90°C ***			
CF-081 60/40	1 800 m ³ /h	2 100 m ³ /h	2 000 m ³ /h	* Process air flow to have dry air at 6 g/kg with regeneration temperature 45°C. ** Process air flow to have dry air at 4 g/kg with regeneration temperature 70°C. *** Process air flow to have dry air at 3 g/kg with regeneration temperature 90°C. For all Consort 60/40 data: Process air and regeneration air inlet at 20°C / 60%RH / 8,7g/kg. Wet air flow 2/3 of process airflow.		
CF-101 60/40	2 900 m ³ /h	3 300 m ³ /h	3 200 m ³ /h			
CF-102 60/40	5 700 m ³ /h	6 500 m ³ /h	6 300 m ³ /h			
CF-122 60/40	9 300 m ³ /h	10 600 m ³ /h	10 300 m ³ /h			
CF-152 60/40	14 700 m ³ /h	16 800 m ³ /h	16 200 m ³ /h			
CF-172 60/40	18 700 m ³ /h	21 300 m ³ /h	20 700 m ³ /h			
CF-192 60/40	23 700 m ³ /h	27 000 m ³ /h	26 200 m ³ /h			
CF-222 60/40	30 400 m ³ /h	34 700 m ³ /h	33 600 m ³ /h			
CF-242 60/40	36 200 m ³ /h	41 300 m ³ /h	40 100 m ³ /h			

Recusorb dp - for low dewpoints, one pushing fan for both dry air and wet air						
Unit	Dew point -30°C *	Heater power *	Dew point -50°C **	Heater power **	Dew point -65°C ***	Heater power ***
RF-081 dp	900 m ³ /h	11 kW	400 m ³ /h	5 kW	400 m ³ /h	6 kW
RF-101 dp	1 400 m ³ /h	17 kW	700 m ³ /h	9 kW	700 m ³ /h	10 kW
RF-102 dp	2 900 m ³ /h	36 kW	1 400 m ³ /h	15 kW	1 400 m ³ /h	20 kW
RF-122 dp	4 700 m ³ /h	58 kW	2 300 m ³ /h	29 kW	2 300 m ³ /h	33 kW
RF-152 dp	7 600 m ³ /h	94 kW	3 800 m ³ /h	47 kW	3 800 m ³ /h	54 kW
RF-172 dp	9 600 m ³ /h	119 kW	4 800 m ³ /h	60 kW	4 800 m ³ /h	69 kW
RF-192 dp	12 200 m ³ /h	151 kW	6 100 m ³ /h	76 kW	6 100 m ³ /h	87 kW
RF-222 dp	15 700 m ³ /h	195 kW	7 800 m ³ /h	97 kW	7 800 m ³ /h	111 kW
RF-242 dp	18 700 m ³ /h	232 kW	9 300 m ³ /h	115 kW	9 300 m ³ /h	133 kW
* Dry airflow to have dry air at -30°C dp with air inlet at 8°C/100%RH. Regeneration temperature 140°C ** Dry airflow to have dry air at -50°C dp with air inlet at 5°C/100%RH. Regeneration temperature 140°C *** Dry airflow to have dry air at -65°Cdp with air inlet at 5°C/100%RH. Zeolite rotor. Regeneration temperature 180°C For all Recusorb dp: Wet air flow 1/2 of process air flow.						

Rätten till ändringar utan föregående meddelande förbehålls. Installationsritning finns att ladda ner från www.dst-sg.com